

Camelot – Basic Directions

Class exercise ring size:


- Plain - 16 AWG (1.29mm) 0.313" (7.9mm)
- Blue - 18 AWG (1.02mm) 0.125" (3.2mm)
- Red - 16 AWG (1.29mm) 0.156" (4.0mm)
- Green - 18 AWG (1.02mm) 0.156" (4.0mm)
- Brown - 18 AWG (1.02mm) 0.188" (4.8mm)

1. Close all the plain copper rings.

2. Insert a tail wire in one plain copper ring and connect a second plain copper ring to the first with two blue rings.



3. Hold a plain copper ring on each side of the connection from step 2 and close four green rings, through all three plain copper rings, as shown. I find it easiest to insert the rings in 1, 2, 3, 4 order.

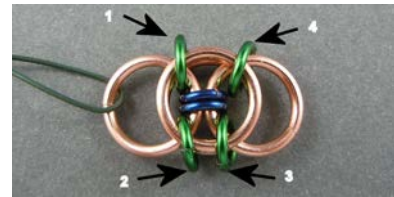

4. Connect a plain copper ring to the end of the chain with two blue rings.



5. Hold a plain copper ring on each side of the connection from step 4 and close four green rings, through all three plain copper rings, as shown.



6. Repeat steps 4 and 5 until complete.



7. Starting at one end of the chain connect each pair of green rings together with a red ring.



8. Starting at one end of the chain connect the 1st and 2nd red rings together with a pair of brown rings on both sides of the chain. Connect the 3rd and 4th red rings together with a pair of brown rings on both sides of the chain. Repeat to the end of the chain.

